


# AI Customized Board

DB3399Pro

Geniatech

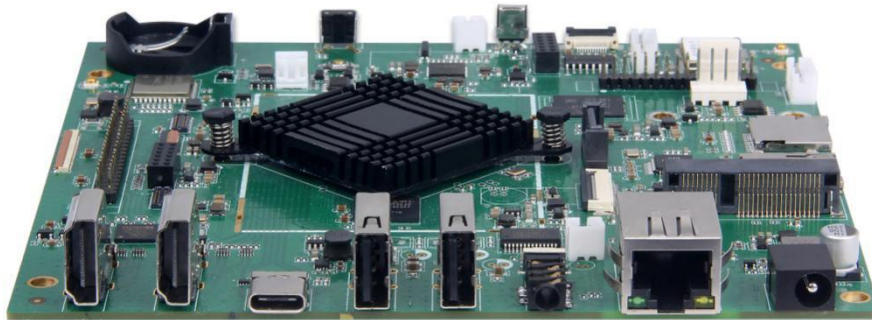

- Support TensorFlow Lite and AndroidNN API, AI tool support Caffe/TensorFlow.
- 3GB RAM, 8GB eMMC, external expansion storage SD card (max. 64GB)
- Built-in WiFi, 1000M LAN interface, support POE
- Dual-Core Cortex A72@1.8GHz+Quad-core A53 @1.4GHz, support Android 8.1OS / Linux.
- USB, SD, TF external storage, support 4K VP9 play
- Designed for retail, interactive communication



## FEATURES

CHIPSET		Rockchip RK3399Pro
MARKET AREA		Global
OSD LANGUAGE		English/Chinese (multi language OSD)
Processor	OS	Android 8.1
	CPU	Dual-CoreA72@1.8GHz+Quad-core A53 @1.4GHz
	GPU	Mali T860MP4
	DDR	3GB (6GB Option)
	EMMC FLASH	8GB(16G/32G Option)
Can support Panel	Panel type	TFT LCD
	LCD Interface	LVDS / EDP/Mipi
	Resolution	1920*1080
	Voltage	3.3 V/12V
Network	Ethernet	RJ45, 100/1000M
	WiFi	802.11.b/g/n
	Bluetooth	BT4.2
	3G/4G	Option
Standby Power		<0.5W
Interface	SD	SD card *1(max. 64GB)
	HDMI	HDMI out*1, HDMI in*1
	USB Host	USB Host 2.0*1
	USB OTG	USB OTG 2.0*1
	DC IN	DC IN*1
Size		140*140*15 mm
Adapter		DC12V / 3A
Accessory		Adapter*1
Customizable GUI		We provided GUI customization and we have a vast collection of Launcher created by our R&D team for you to choose from.
Rich Applications		There are over 1 million applications in the market, and supports most famous applications like: Youtube, Facebook, and Twitter, etc..