


HD Video Caputre

HDCap MM5516

Geniatech

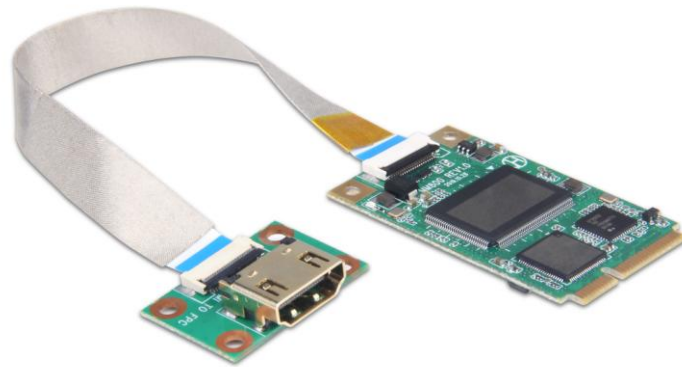

HD Cap MM5516 full HD Video capture card is an internal 1080P60 capture minicard (PCIe×1) for PC. It supports UVC and no need to install driver any more comparing with other capture cards in the market . Moreover, it is compatible with most third party media player,smoothly connecting with the mainstream broadcast platform which can transfer web broadcast, video conference and other application software like Skype,Facebook Live、YouTube Live、LiveStream、UStream、Dacast、Wowza Cloud. It works on Windows, MacOS, Linux, Android and other main OS.

- Driver Free
- Support Mac, Windows, Android, Linux OS
- support HDMI input and microphone Input. Users can add any other audio into the video through microphone when video recording
- Support 4K 30fps HDMI input, and 1080P 60fps HDMI ouput. It can connect to large screen television, so users can watch high quality video on the big screen while capturing and broadcasting
- Strong system compatibility
- Compatible with most third-party mainstream media players



Product Features

Minicard (PCIe x1)

- HDMI input
- HDMI Out Connecting Large Screen TV
- Microphone input, recording your voice commentary and video together
- Supported External device: Blu-ray DVD, WiiU, Xbox360, Xbox One, Ps4, HDMI PVR, Armariium..
- Scenario: video conference, Speech Recording, Tele-medicin, Stream media and so on.
- Maximum input resolution: 4K@30fps
- Maximum recording resolution: 1080P@60fps

Product Applications

- Compatible with most third-party mainstream media players Adobe Flash Media Live Encoder (Windows, OS X), Real Producer Plus (Windows), QuickTime Broadcaster (OS X), QuickTime Player (OS X), Windows Media Encoder (Windows), Daum Potplayer (Windows, OS X), Xsplit Broadcaster (Windows, OS X), VLC (Windows, OS X, Linux), Wirecast (Windows, OS X), OBS Studio (Windows, OS X), OBS Broadcaster (Windows, Mac OS X), vMix (Windows), AMCAP, ...
- Support OS: Windows 7/8/8.1/10, OS X 10.9 and above, Linux, Android

I/O Interface

Host interface	Minicard (PCIe x1)
Video/Audio input	1x HDMI; 1x Microphone
Video/Audio output	1x HDMI

Mechanical

Dimension	51 x 30 x 4.65mm
Weight	11g
Environment	Operating Temp. 0~50°C Storage Temp. -20°C to 60°C Humidity: 10 to 85%
Certification	CE/FCC